



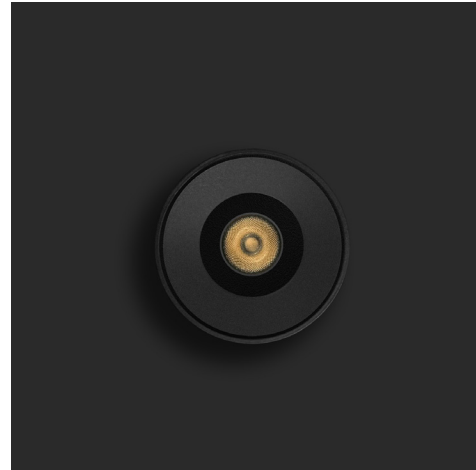

ARTUS CIRC LAC MARINE Multi-Directional Surface-Mounted

Quick Facts

- Remote Powered, Class 2 Fixture
- 12W Cree LED
- Available in Warm White (2700K) and Soft White (3000K)
- 2-step SDCM ellipse for accurate color consistency between fixtures
- Up to 1000lm from source (IES files available upon request)
- Full dimming range via remote power supply
- Visible Dimensions - 110mm x 55mm x 55mm (4-3/8" x 2-3/16" x 2-3/16")
- 360° rotation with 60° adjustability from nadir
- Suitable for installation in drywall, wood, and stone ceilings
- Suitable for dry and damp locations
- UL Listed
- Engineered and made in Germany

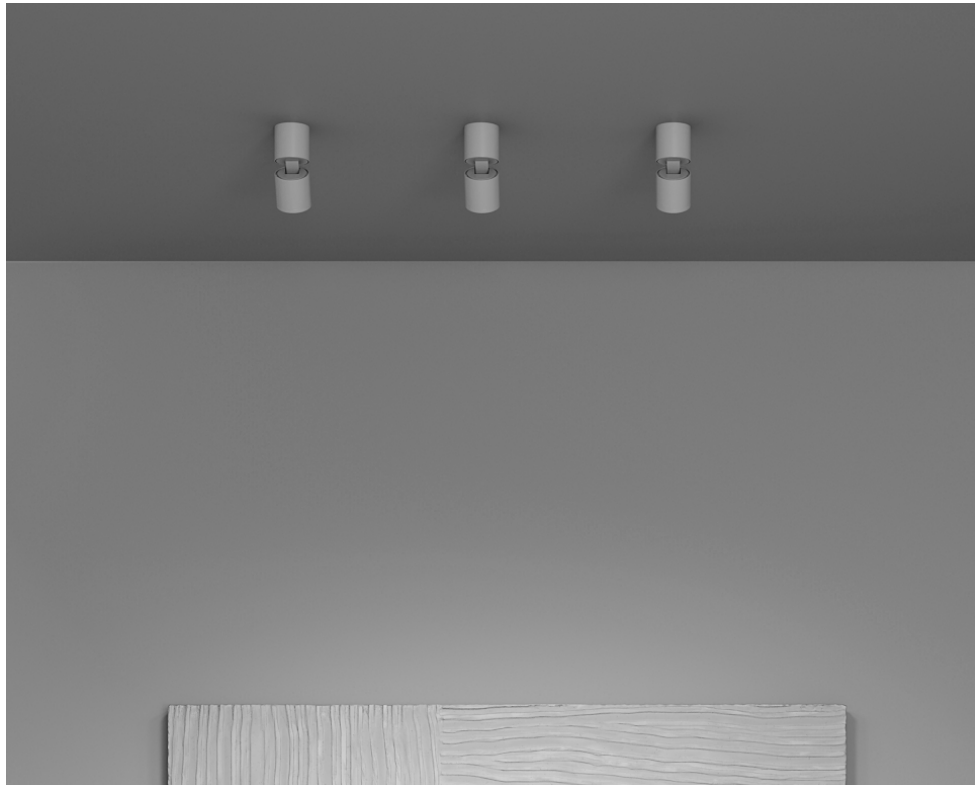

Description

Introducing the ARTUS CIRC LAC MARINE. This luminary transcends conventional illumination, offering a mesmerizing multi-directional glow that captivates the senses. With its elegantly curved design and versatile lighting angles, the ARTUS CIRC LAC MARINE is a testament to refined craftsmanship and contemporary sophistication. Designed with meticulous attention to detail, the ARTUS CIRC LAC MARINE casts its radiant glow in every direction, illuminating your space with unparalleled precision. Elevate your surroundings with its sleek and modern aesthetic, seamlessly integrating into any decor with effortless grace.

Construction

- Extruded aluminum fixture body
- 50,000 hours LED lifetime
- Approximate fixture weight: 720g (1.58lbs)
- Operating Temperature: 10°C to 50°C
- 360° rotation with 60° adjustability from nadir

Fixture Size

- Visible Dimensions: 110mm x 55 mm x 55 mm (4-3/8" x 2-3/16" x 2-3/16")
- Recess Depth: N/A - junction box not required

Light Output

- High performance Cree LED, available in various color temperatures
- 1000lm source light output
- 2-step SDCM ellipse
- Color rendering index (CRI) min. 90
- Integral microprocessor controlled thermal protection

Electrical Specifications

- Class 2 Fixture
- Constant Current 910mA, 12V DC Input
- 12W Power Consumption
- Remote 910mA Constant Current Driver Required
- 0-10V 0.1% Dimming (or) 1-10V/Push/DALI (or) Phase Dimming drivers available
- Recommended wire, min. 16 AWG plenum rated (CMP, when required) up to 82ft from remote transformer
- Electrical wiring made of fine-stranded, nickel-plated copper wire according to IEC 60092-NORM and VDE 0295, Class 5

Installation Types

- Surface-Mounted: Standard installation to most ceiling surfaces using anchors or screws (not provided)
- Profile: Surface-mounted in the LINIAR System profile using anchors or screws (not provided)
- Semi-Recessed: Magnetically attached in the NEXU System enclosure (not provided)

Listings

- UL Listed, CE Conform
- Suitable for dry and damp locations

Resources

Scan QR Code or visit at apurelighting.com/resources/



Resources

ORDERING INFORMATION

SERIES

- ☐ AR - Artus Series

MODEL

- ☐ 6 - Artus Lac Circ

TYPE

- ☐ M - Marine

ORIENTATION

- ☐ M - Multi-Directional

FIXTURE FINISH

- ☐ BA - Black Anodized
☐ WH - White Powder Coat

TEMPERATURE (CCT)

- ☐ 27 - Warm White (2700K)
☐ 30 - Soft White (3000K)

COLOR RENDERING INDEX

- ☐ 90 - ≥90

OPTICS (DEGREE)

- ☐ S - Spot (14°)
☐ N - Flood (36°)
☐ F - Wide Flood (55°)

DIMMING PROTOCOL




- ☐ CC - DALI-2 / Phase Dim (910mA Constant Current, 12VDC)*

*remote powered fixture, power supply required

ORDERING EXAMPLE

AR6MMBA3090FCC

LED Photometrics

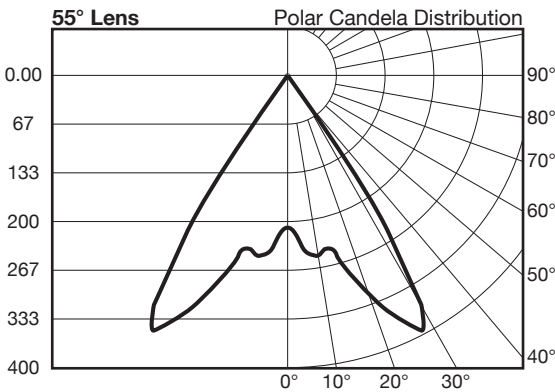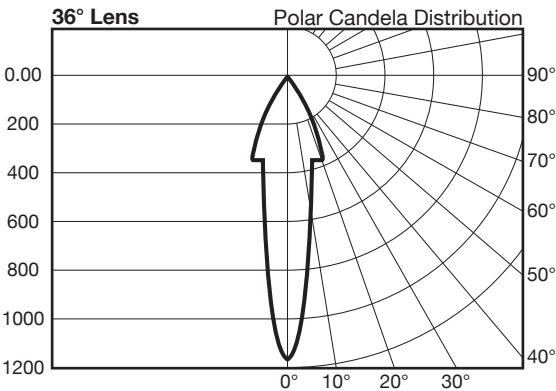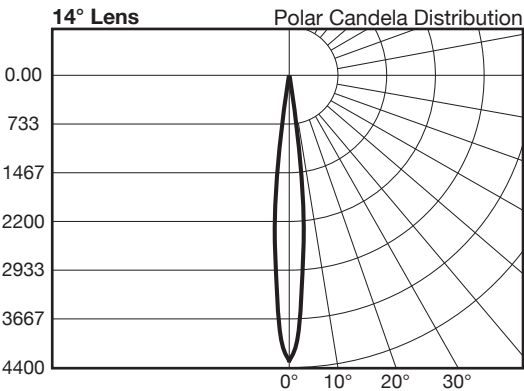

Accessory for Installation Type

Surface Mounted (Standard)
Semi-Recessed (Nexu System)*
Profile System (Linair System)*

Part Number
None Required
NSBRKUXX
LSXXXX

Thickness
--
Various
15mm

Listings
--
UL
--

Remote Power Supply for CC or EU Variant - [CC]

Apure Phase Dimmable (1000mA 26W)
Apure Phase Dimmable (1000mA 65W)
KGP DALI 2 NFC Touch Dim (500-1000mA 53.2W)**

Part Number
AA32202DEU
AA32205DEU
AA3DALI2EU

Input Voltage
220-240Vac
220-240Vac
220-240Vac


Listings
CE
CE
CE

*Refer to cutsheet for more information.
**Driver enclosure required where applicable.

Custom Installation Types

- Observe and follow all local and national installation codes for all installation types.
- Test and make sure that all fixtures are working properly before any mudding, painting or finishing occurs!
- Read and adhere to all instructions supplied with each power supply and fixture.
- Follow all instructions supplied by power supply / driver manufacturer!

Wiring Diagram for Constant Current Artus products - [CC]

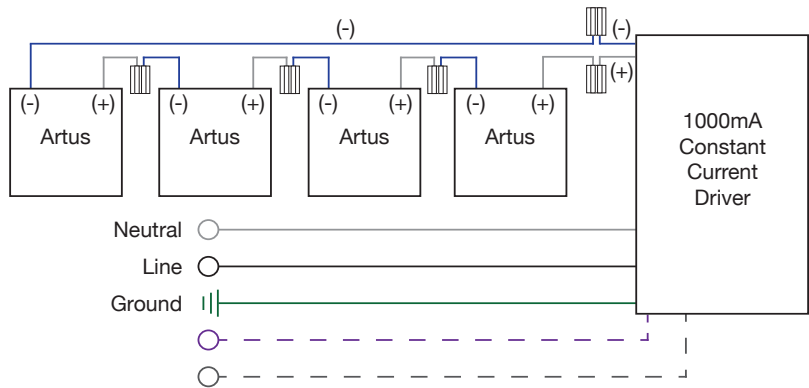

Fixture Leads
White (+)
Blue (-)

Warning: failure to wire correctly may cause fixture to fail.

Additional Considerations

The above wiring diagram applies only to Constant Current Minus products with product ordering codes ending with “CC”. The diagram above shows the typical wiring schematic, however the total number of fixtures per driver is driver specific.

- | | | |
|---|-----------|---------------------|
| • Apure Phase Dimmable (1000mA 26W) | 1-2 Artus | 16AWG - 82ft (25m) |
| • Apure Phase Dimmable (1000mA 65W) | 3-5 Artus | 16AWG - 82ft (25m) |
| • KGP DALI 2 NFC Touch Dim (500-1000mA 53.2W) | 1-4 Artus | 16AWG - 150ft (50m) |

WARNING: The power supply must operate within the range of minimum to maximum fixtures. Operation with less or more fixtures from the specified amount will result in damage to the power supply and/or lighting fixture. Incorrectly wiring the Constant Current lighting fixture may cause luminaire to fail.